



PMX 1000V DC

PV fuse holder
for cylindrical fuse links

PMX

10x38



10x38



14x51



22x65

PROTECTING THE WORLD



PMX 1000V DC

PV fuse holder
for cylindrical fuse links

10x38

PHOTOVOLTAIC

HORUS
PHOTOVOLTAIC
PROTECTION

10x38

RATED CURRENT
32A

RATED VOLTAGE
690V AC
1000V DC

MAXIMUM POWER DISSIPATION
4W

PROTECTION INDEX
IP20

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-2
UL 4248-1
UL 4248-19
UL 486E
CSA C22.2 N° 4248-1
CSA 22.2 N° 65



**PATENTED
DESIGN**

Modular fuse holders that offer 1000V DC rated voltages

Modular fuse holder for cylindrical fuse link size 10x38 according IEC/EN 60269 standard.

Compact design, with reduced dimensions.

Ventilation zones optimized for a better heat dissipation.

Manufactured with a high quality materials

- Silver plated copper contacts.
- Plastic materials with high temperature resistance and self-extinguishable.
- All the materials are according to the European Directive RoHS.



Extended range of accessories is available.









UL certification (File E359201).
CSA certification (File 221680).



Accessories

REFERENCE	DESCRIPTION	PACKING Uni /BOX
480005	PINS FOR MULTIPOLE ASSEMBLY	12
485050	HANDLE TIES FOR MULTIPOLE ASSEMBLY	12
485051	LOCK ACCESSORY	5
485052	SPECIAL IP20 PROTECTION ACCESSORY	24
485053	PHASE SEPARATOR ACCESSORY	12
485056	REPLACEMENT FUSING INDICATOR 1000V DC	12
485656	SCREWS PROTECTION ACCESSORY	20

Range

REFERENCE	INDICATOR	POLES	MODULES	PACKING Uni /BOX
485150  	—	1P	1	12/192
485151  	—	2P	2	6/96
485152  	•	1P	1	12/192
485153  	•	2P	2	6/96



PMX 1000V DC

PV fuse holder
for cylindrical fuse links

10x38

PHOTOVOLTAIC


HORUS
PHOTOVOLTAIC
PROTECTION

Technical data

Rated current	32A												
Rated voltage	690V AC 1000V DC												
Maximum power dissipation	4W												
Power dissipation per pole	80% $I_n > 0,27W$ 100% $I_n > 0,43W$												
Utilization category as per EN 60947-3	690V > AC-21B 1000V DC > DC-20B												
Pollution degree	3												
Protection index *	IP20												
Rated impulse withstand voltage	6kV U_{imp}												
Ambient temperature of service	-20°C ... 70°C												
Storage temperature	-40°C ... 80°C												
Derating by number of poles	<table> <tr> <th>POLES</th><th>I_{MAX}</th></tr> <tr> <td>1 ... 4</td><td>I_n</td></tr> <tr> <td>5 ... 6</td><td>$0,8 \times I_n$</td></tr> <tr> <td>7 ... 9</td><td>$0,7 \times I_n$</td></tr> <tr> <td>≥ 10</td><td>$0,6 \times I_n$</td></tr> </table>	POLES	I_{MAX}	1 ... 4	I_n	5 ... 6	$0,8 \times I_n$	7 ... 9	$0,7 \times I_n$	≥ 10	$0,6 \times I_n$		
POLES	I_{MAX}												
1 ... 4	I_n												
5 ... 6	$0,8 \times I_n$												
7 ... 9	$0,7 \times I_n$												
≥ 10	$0,6 \times I_n$												
Correction of the admissible current in function of the temperature	<table> <tr> <td>20° C</td><td>1</td></tr> <tr> <td>30° C</td><td>0,95</td></tr> <tr> <td>40° C</td><td>0,90</td></tr> <tr> <td>50° C</td><td>0,80</td></tr> <tr> <td>60° C</td><td>0,70</td></tr> <tr> <td>70° C</td><td>0,60</td></tr> </table>	20° C	1	30° C	0,95	40° C	0,90	50° C	0,80	60° C	0,70	70° C	0,60
20° C	1												
30° C	0,95												
40° C	0,90												
50° C	0,80												
60° C	0,70												
70° C	0,60												

* For wires of section $\leq 6mm^2$ is necessary the use of the accessory to guarantee IP20 in clamps zone. ► **FIG. 4**

Dimensions

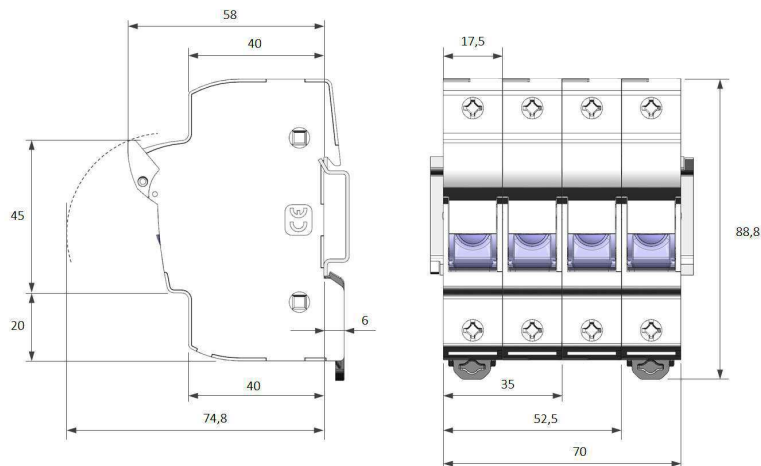

Weight

1P	57gr
2P	114gr

Weight without packing

Standards

IEC/EN 60269-1
IEC/EN 60269-2
UL4248-1 Fuse holders
UL4248-19 Photovoltaic fuse holders
UL486E Wiring terminals
CSA C22.2 N° 4248-1 Fuse holder assemblies
CSA 22.2 N° 65 Wire connectors

Certifications



Application characteristics

For mounting on DIN/EN standard rail


DIN 46277/1-3 (EN50022)
Clip fixation with 2 positions

Screw fixation

Available with accessory
► FIG. 7

Connecting wire

Copper wires only

WIRES	METRIC	AWG	WIRING
1	0,75...16mm ² Solid / Stranded	8.....14 AWG Solid / Stranded	
2	0,75...10mm ² Solid	8.....14 AWG Solid	
Same cross section and type	0,75...6mm ² Stranded	10.....14 AWG Stranded	

Wire-end terminals

The use of wire-end terminals may allow to increase the connecting wire section.

Wire-end terminals recommended mounting:



The use of wire-end terminals could not guarantee the IP20 protection degree.

Ferrules

It's recommended use of ferrules in wires with section ≤ 2,5mm²



The product is delivered with the terminals opened and ready to connect

Accessories

FIG. 1 | Multipolar assembly

Standard system by DF, 2 clips and 1 pin for each union between poles

480005	PINS FOR MULTIPOLE ASSE
485050	HANDLE TIES FOR MULTIPOLE ASSEMBLY


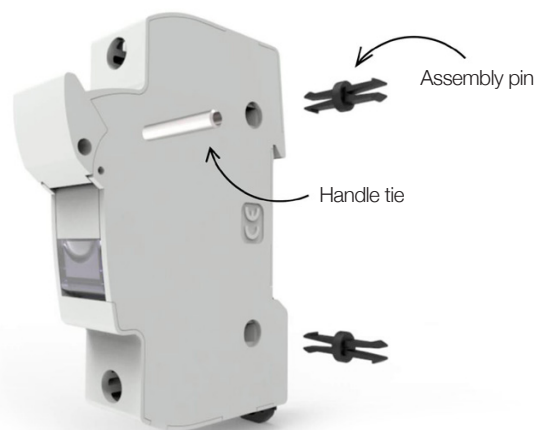


FIG. 2 | Identification by label

Open the label holder part with the fuse holder closed, put on the label and close it

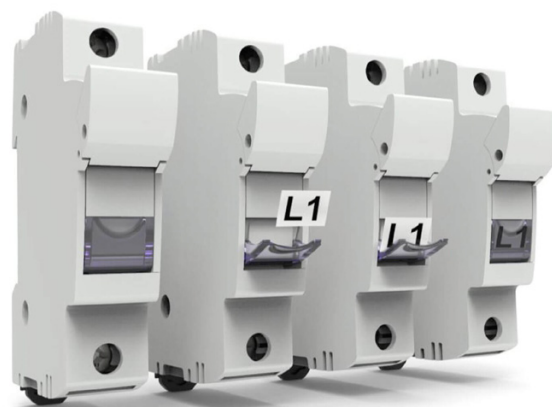

Label measures **11x9mm**

Accessories

FIG. 3 | Lock of the fuse holder

Systems to avoid the operation and connection when the fuse holder is open or closed

485051 LOCK ACCESSORY

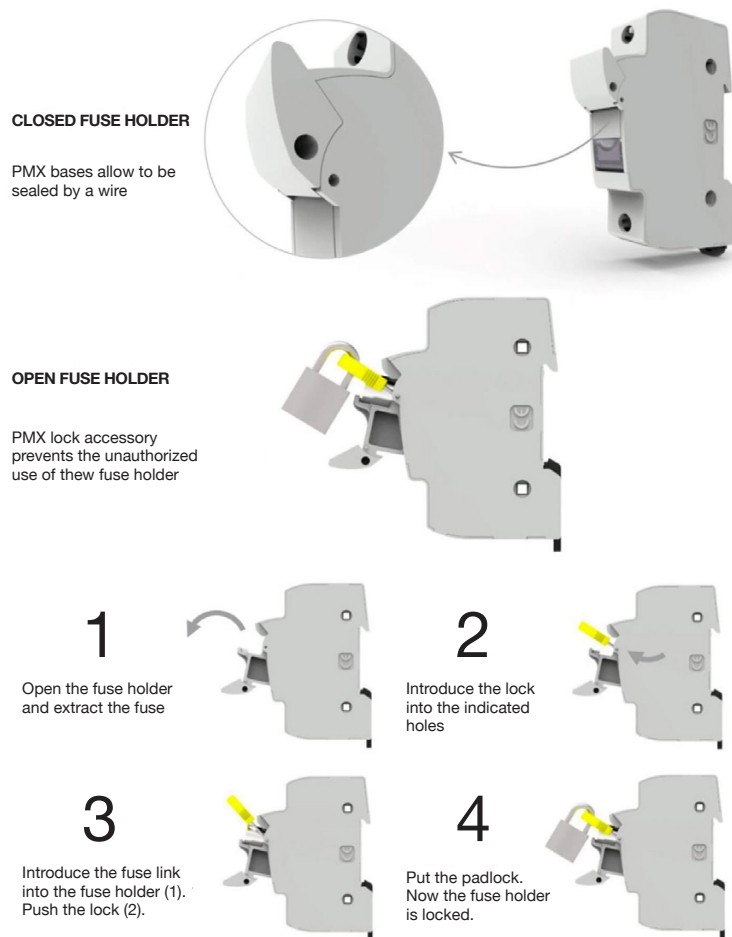


FIG. 4 | Special IP20 protection

The accessory must be positioned in the wire entries, if it's necessary to achieve the IP20 degree of protection with thin wires

485052 SPECIAL IP20 PROTECTION ACCESSORY

Manual assembly



FIG. 5 | Phase separators accessory

The accessory increases the distance between phases in multipolar assemblies

485053 PHASE SEPARATOR ACCESSORY



Accessories

FIG. 6 | Screw's protection accessory

Protection accessory to avoid the screws manipulation and improve the protection degree

485656 SCREW'S PROTECTION ACCESSORY

Manual assembly



FIG. 7 | Screw fixation accessory

First mount the accessory with screws, then mount the fuse holder (there are available different accessories depending on the number of the fuse holder)

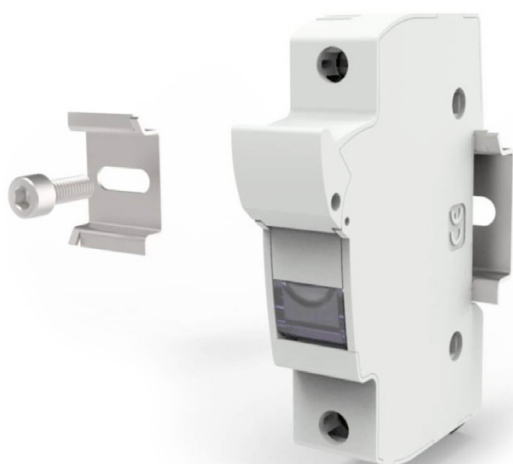


FIG. 8 | Fusing indicator replacement instructions


1

Open the fuse holder



2


Using a flat screwdriver, remove the cover with a slight rotation of the tool

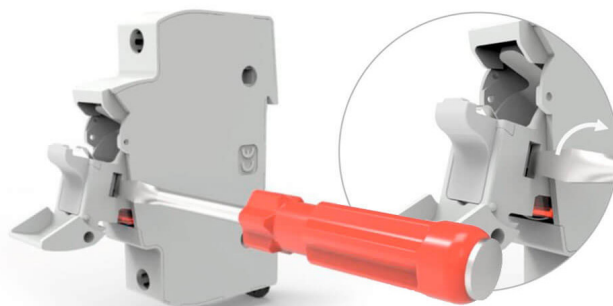

3

Replace the fusing indicator. Enter the cover on the handle with a slight angle



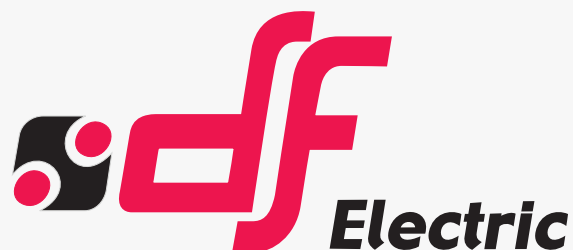

PROTECTING THE WORLD



HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

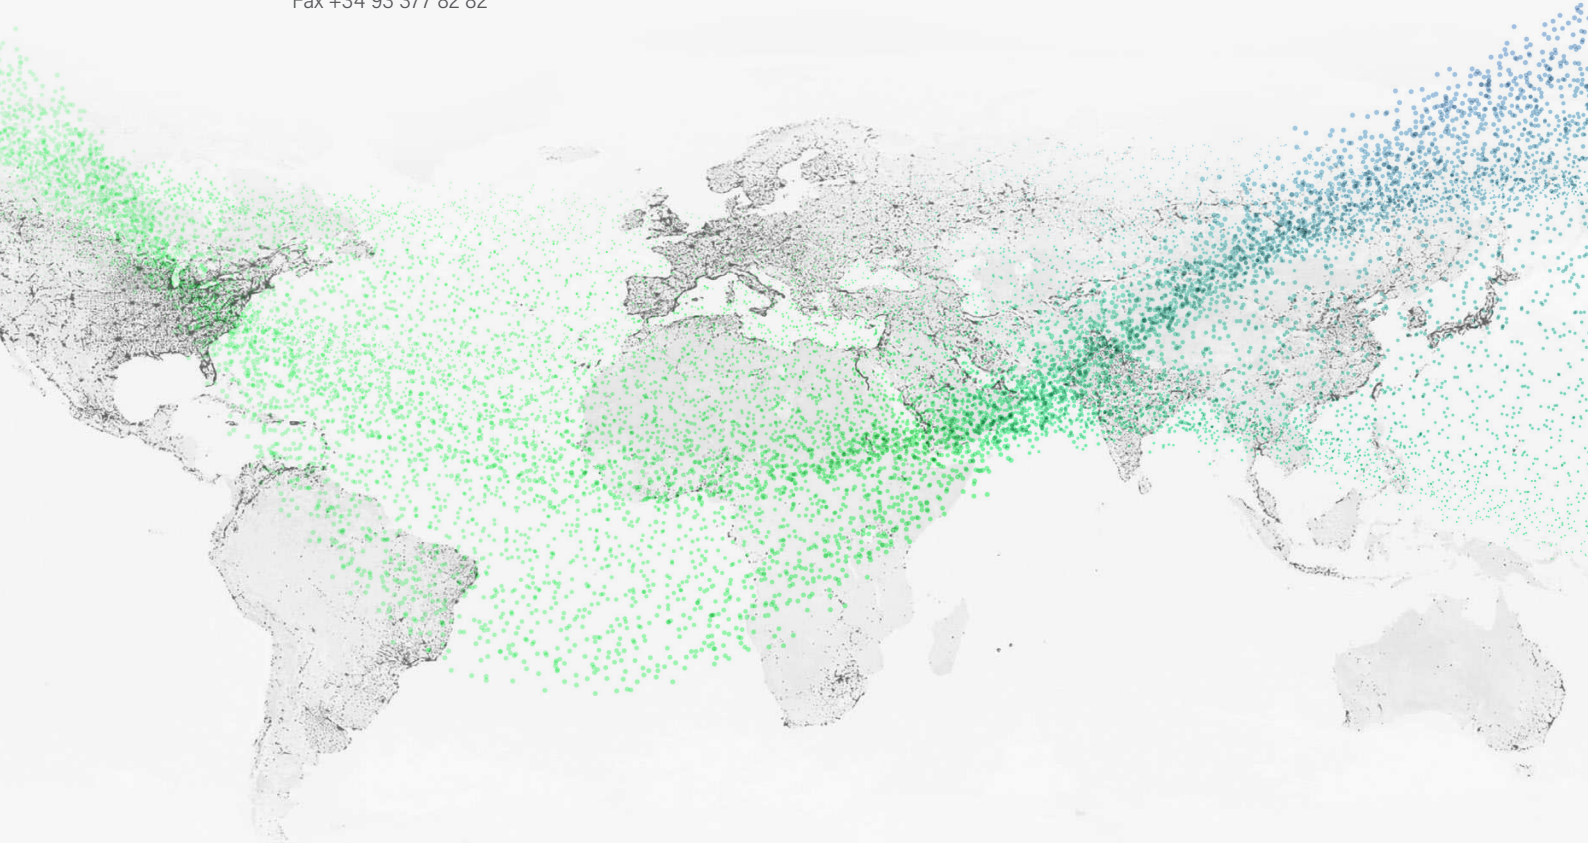

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2023 DF Electric. All rights reserved